


DESIGNPANEL GLOBE G1F 900


PERFORATION DETAILS

Perforation type	Globe - 6 mm round holes
Perforation percentage	9,8 %
Perforation pattern	G1F

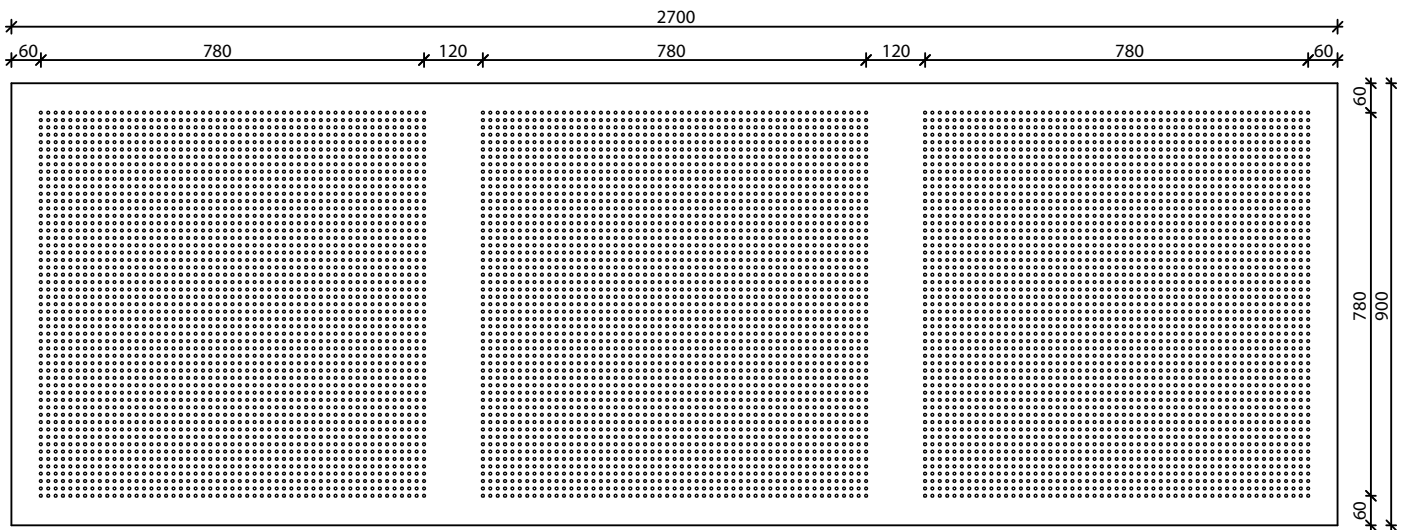

ABSORPTION COEFFICIENTS

Frequency (Hz)	125	250	500	1000	2000	4000
α_p	0,35	0,70	0,80	0,75	0,60	0,50

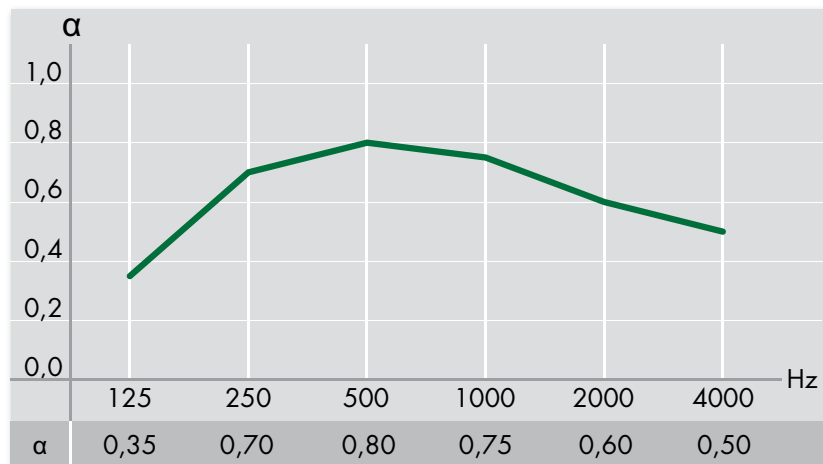


At 65 mm and with 50 mm mineral wool

DESIGNPANEL GLOBE G2F 1200


PERFORATION DETAILS

Perforation type	Globe - 6 mm round holes
Perforation percentage	8,6 %
Perforation pattern	G2F

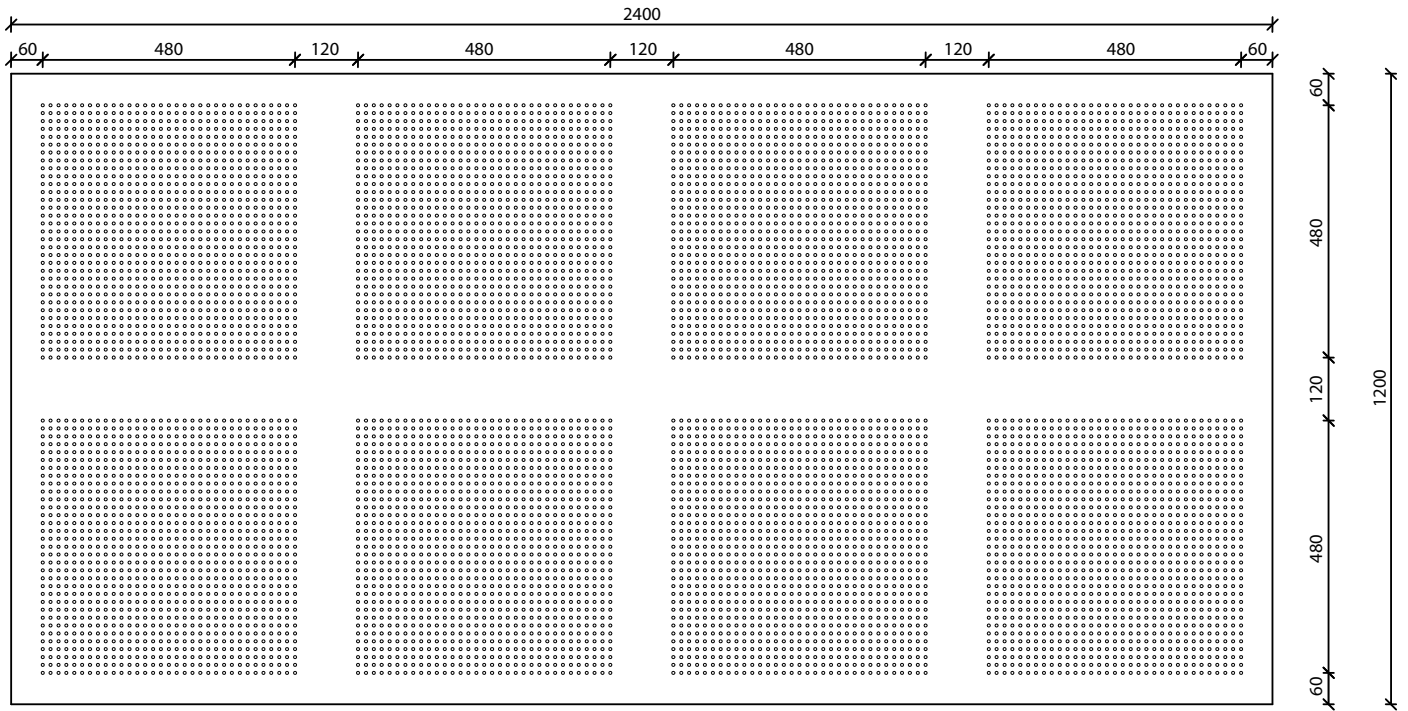

ABSORPTION COEFFICIENTS

Frequency (Hz)	125	250	500	1000	2000	4000
α_p	0,35	0,60	0,70	0,65	0,50	0,45

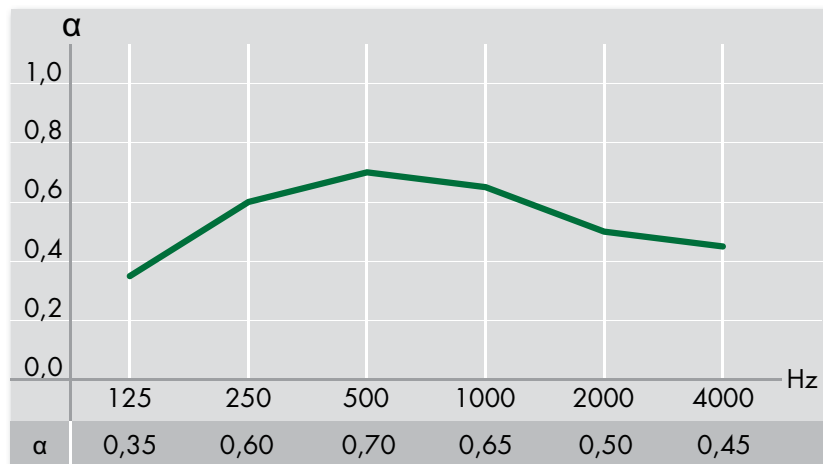

At 65 mm and with 50 mm mineral wool